


PAGE 1/2



HRHZ...

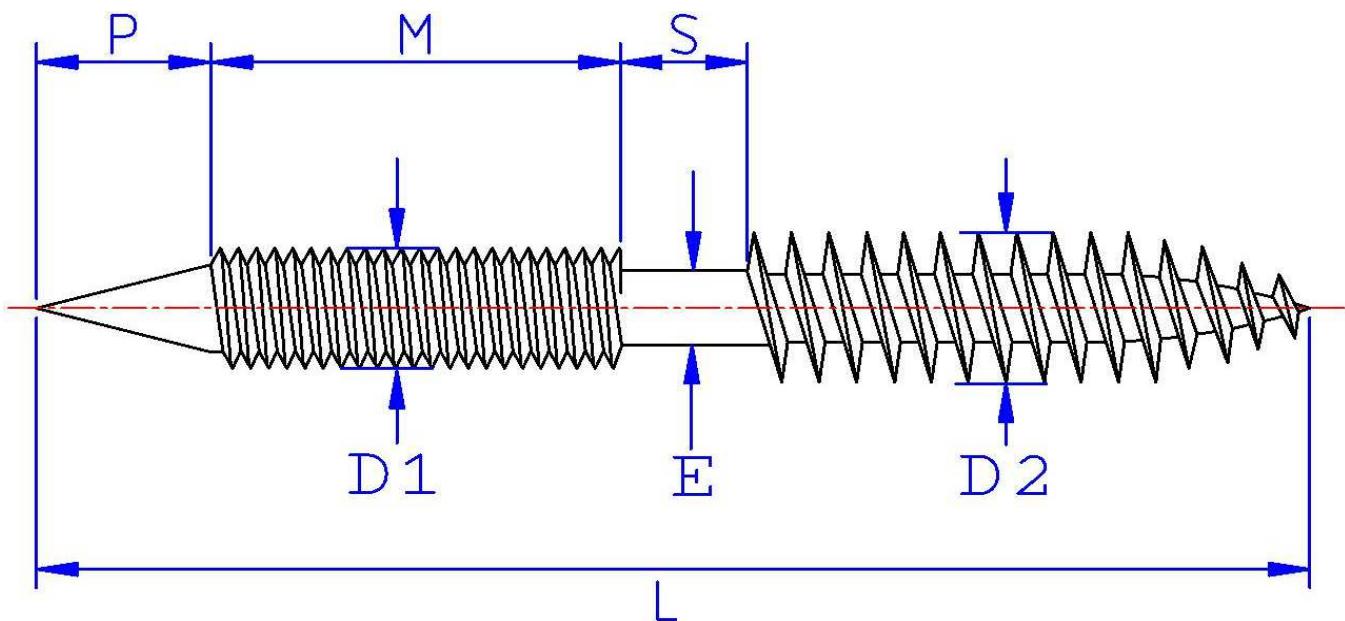

unit: INCH

L LENGTH TOLERANCE	3-1/2"	+ 0	- 0.09
--------------------------	--------	-----	--------

D1 THREAD
UNC 2A
5/16 - 18

SCREW		P POINT LENGTH	M D1 LENGTH	S SPACE LENGTH	E BODY DIAM.
5/16	Min	0.290	1.150	0.340	0.270
	Max	0.310	1.210	0.360	0.281

D1 THREAD DIAM.	THREAD PER INCH
0.303	18
0.311	9

D2 THREAD DIAM.	THREAD PER INCH
0.313	
0.324	9



Date: 13 août 2010

Fait par: D.G.

PAGE 2/2



HRHZ...

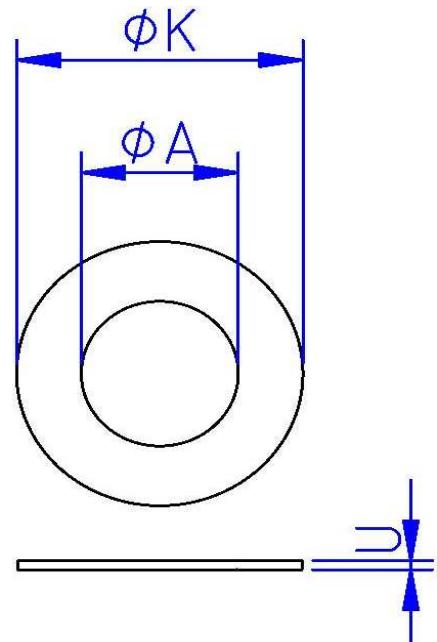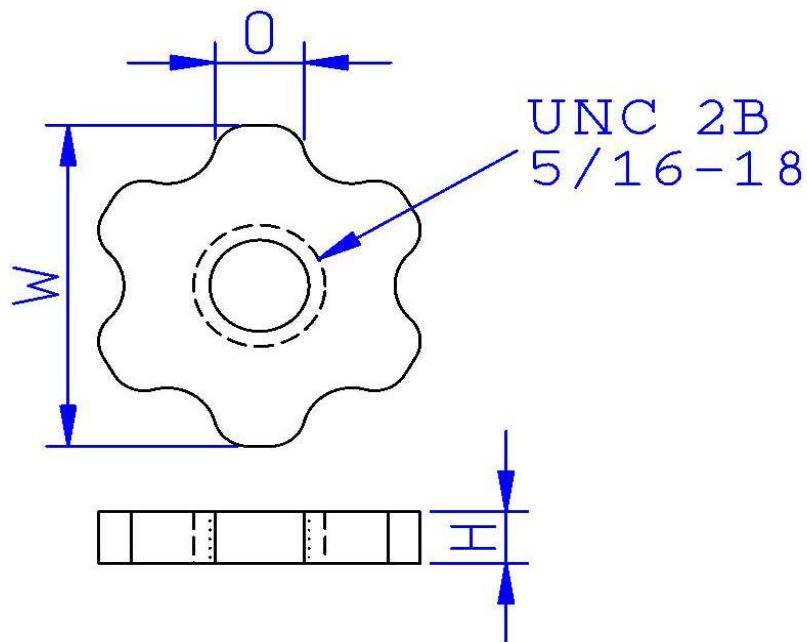

unit: INCH

NUT		W WIDENESS	H THICKNESS	O PROTRUSION
5/16	Min	0.825	0.175	0.195
	Max	0.837	0.185	0.210

WASHER		K EXT. DIAM.	A INT. DIAM.	U THICKNESS
5/16	Min	0.688	0.380	0.051
	Max	0.710	0.400	0.065

Date: 13 août 2010

Fait par: D.G.